



VHF RADIOTELEPHONE

JHS-770S/780D



— a first class VHF with an advanced modular design that allows for maximum installation flexibility

Direct call by AIS™
Easy operation with JOG dial
Intercom & loudhailer function
3.8" high brightness LCD screen
120 seconds recording



AMI Marine Co., Ltd
Ph: +84 (254) 3513 345
Fax: +84 (254) 3513 346
Email: vietnam@amisales.com.vn

A: 6th Floor, Silver Sea Towers,
47 Ba Cu street, Ward 1, Vung Tau City,
Ba Ria - Vung Tau Province - Vietnam
Visit us online: www.amisales.com.vn

VHF series

– performance features

Unique features

- Available as semi-duplex or full-duplex, this class A VHF radiotelephone incorporates advanced modular design that allows for maximum installation flexibility.



Direct call by AIS™

When connecting your AIS to the new VHF, new possibilities become available. This innovative feature, unique to JRC, allows you with one push of the button, to quickly navigate through a list of targets in your surrounding area. Bearing, range and MMSI information of target vessels are sorted from the shortest range upwards. You can now easily select the vessel you wish to get in contact with, and send a DSC message immediately.

Intercom and loudhailer

The VHF radiotelephone has an intercom functionality for easy communication with multiple other VHF controllers onboard! Additionally, to always be in full control and on top of communication with deck or dock hands, a loudhailer function is built in. An optional external speaker with amplifier increases talk power, making your messaging loud and clear, thereby adding to the safety of the vessel.

Clear display

Improved visibility is realised by the integrated 3.8" high brightness silver LCD screen with excellent sunlight viewability. The main data is displayed in large characters for easy reading.

Extendable up to 5 controllers

The VHF series configuration allows having up to 5 controllers covering various important sections onboard. Additionally, there is a range of possibilities for connecting extra handsets and printers.

120 seconds digital recording

JRC has included a recording function for the last 120 seconds of open squelch (voice).

In situations where loud engines or other background noises disrupt your reception, this characteristic feature enables you to immediately repeat any unclear messages.



VHF series

–developed for maximum ease of use

Wing controller

For wing and/or outside applications, JRC has developed an optional, simplified channel selector. This compact weatherproof unit allows basic operation, such as channel and power selection, and has a channel 16 preset.



Easy configuration

The JHS-770S/780D is developed upon maximum flexibility, having a separate transceiver and controller allowing flexible installation in confined spaces. Either panel, desktop or overhead mounting is possible with this size reduced VHF radiotelephone.

Easy operation

The combination of push buttons and JOG dial operation, together with JRC's innovative software including easy menu structures ensures logical, accurate and convenient operation.



Simplified squelch and volume operation

Direct call by AIS™

Easy JOG dial operation

StarNetwork™


JRC has been providing sales and support of products since 1915! Today, JRC offers comprehensive support through its organisation, in partnership with a world-wide StarNetwork™ of over 270 fully qualified agents, giving support 24 hours a day, 7 days a week, and 365 days a year!



VHF series

– system flexibility

Configuration

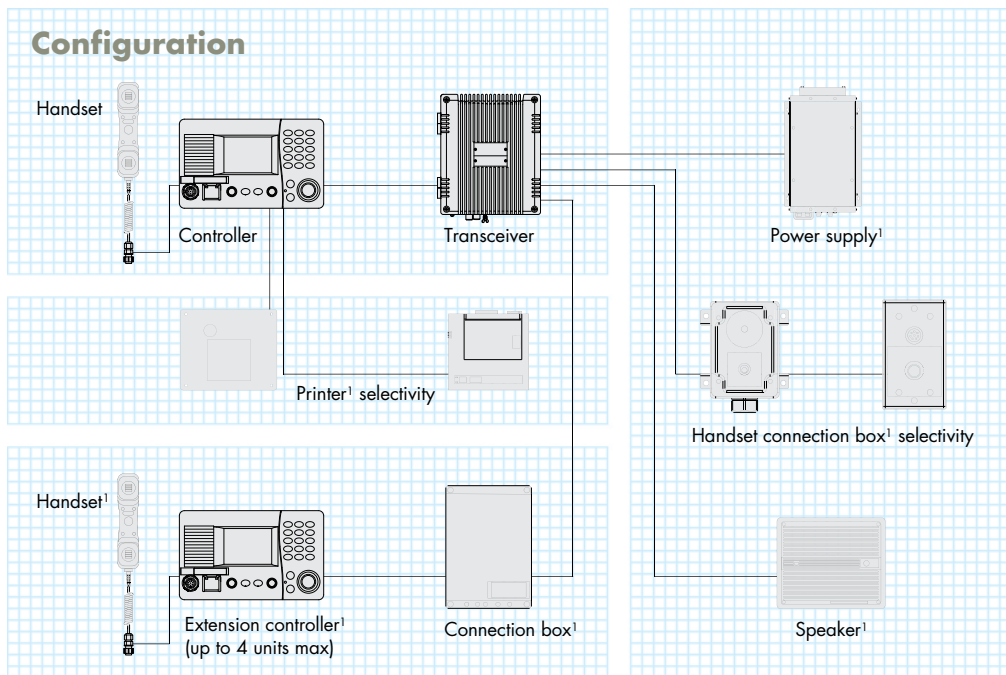

¹optional products

Dimension drawings¹ - Power supply, Channel selector, Connection box

NBD-865
MASS 6.1kg



333 mm

190 mm

NCM-2000
MASS 0.6kg




142 mm

110 mm

WATERPROOF
WALL/FLUSH
MOUNT

NQD-2770
MASS 1.3kg




190 mm

134,2 mm

Dimension drawings² - Handset connection box, Speaker

NQE-1846
MASS 1.1kg
WATERPROOF
WALL MOUNT




160 mm

154 mm

*Flush mount type
(NQE-1845)
available


NQE-1847
MASS 0.3kg
FLUSH MOUNT



120 mm

70 mm

NVS-423
MASS 1.1kg
WALL MOUNT




217 mm

255 mm

Dimension drawings³ - Printer


NKG-91
MASS 0.75kg
WALL MOUNT



142 mm

170 mm

DPU-414
MASS 0.6kg
TABLE MOUNT



160 mm



170 mm

^{1,2,3} optional products

VHF series – dimensions and weights

Dimension drawings - Controller



NCM-1770 MASS 1.3kg




Dimension drawings - Transceiver, Antenna

NTE-770S MASS 6.3kg

NTE-780D MASS 6.9kg





7ABJD0004
MASS 0.3kg

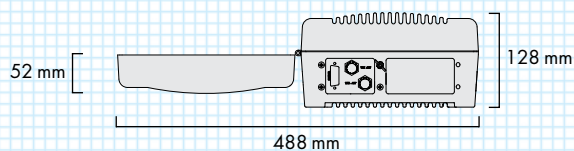

1290±5 mm

Dimension drawings - Handset

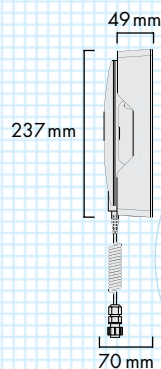

Model
GMDSS
General

Channel

Inputs

Outputs

Environ

Options

Power s
Remote
VHF ch
Control
Flush m
Control
Handse
Handse
Handse
Printer (P
Printer (P
Externa
Externa
Extensio

VHF series

– specifications

Model		JHS-770S	JHS-780D
GMDSS compliance		✓	
General			
	Communication mode	simplex/semi-duplex	simplex/duplex
	Frequency range	155.00 - 163.50MHz	
	TX	155.00 - 163.50MHz (simplex/semi-duplex), 156.00 - 157.45MHz (duplex)	
	RX	155.00 - 163.50MHz (simplex/semi-duplex), 160.60 - 162.05MHz (duplex)	
	Output power	25W/1W	
	Modulation type	radiotelephone G3E/F3E, DSC/ATIS G2B/F2B	
	Channel spacing	25kHz	
	Frequency accuracy	within ±10x10 ⁻⁶	
	Antenna impedance	50Ω unbalanced	
	DSC CH70 receiver	built in	
	DSC CH70 frequency	156.525MHz	
	DSC received message LOG	20 distress messages	
20(TX)+20(RX) non-distress messages			
Channel capacity			
	ITU/USA/Canada	57 channels max	
	Inland Waterway	57 channels max	
	Private	200 channels max (channel steps: 25kHz, 12.5kHz, 10kHz)	
	Weather	10 channels max	
	Memory	10 channels max	
Inputs			
	IEC-61162-1	GPS	
	IEC-61162-2	AIS	
Outputs			
	IEC-61162-1	VDR/S-VDR	
	Audio	600Ω 0dBm balanced (to VDR/S-VDR), unbalanced (to ext. loudspeaker)	
	RS232C	for external printer NKG-91 and DPU-414	
Environmental conditions			
	Power voltage	DC 24V +30% -10%	
	Current consumption	DC 24V input, 8.3A max	
	Ambient condition	temperature: -15°C +55°C (range for full performance 0°C +40°C)	
Optional items			
Power supply unit		NBD-865 (for AC operation)	
Remote VHF controller		NCM-1770(with handset, cradle and cable)	
VHF channel selector		NCM-2000	
Controller connection box		NQD-2770	
Flush mounting kit		MPBC42957(for NCM-1770)	
Controller bracket		MPBX44354	
Handset		NQW-261 (with cradle)	
Handset connection box		NQE-1847	
Handset connection box (waterproof)		NQE-1845(flush mount) / NQE-1846(wall mount)	
Printer (table mount)		DPU-414	
Printer (flush mount)		NKG-91	
External speaker (wall mount)		NVS-423	
External speaker (flush mount)		NVS-423A	
Extension board		CQD-7701 (required for multiple controllers)	